





<b>Description</b>	: EverGreen Dual Flush Elongated Bowl - Extended Height ADA Compliant
<b>Model Number</b>	: 5074-XXX-0075
<b>Compatible item</b>	: 5055-XXX-5137 36-XXX-001 Toilet seat (elongated) 44-XXX-009 Toilet seat (elongated) (soft close hinge)
<b>Water Consumption</b>	: 1.6 GPF / 0.8 GPF
<b>Water Surface</b>	: 4 3/8" x 5 1/8"
<b>Water Depth From Rim</b>	: 11 1/4"
<b>Rough-In</b>	: 12"
<b>Minimum Water Pressure</b>	: 20 psi.
<b>Trap Diameter</b>	: 2" ball pass with 2 1/8" trap diameter
<b>Trap Seal Depth</b>	: 2 3/8"
<b>Shipping Weight</b>	: 54 lbs.
<b>Shipping Dimensions</b>	: 15 1/8"W x 28 3/4"L x 18 7/8"H
<b>Installation Guide</b>	: Vitra Guide # 312858
<b>Included Components</b>	: Tank fittings, bolt caps (white 310359/bone-biscuit 310306) Floor flange adapter
<b>Material</b>	: Vitreous china
<b>Colors</b>	: 003 White 017 Bone, 068 Biscuit (Basic Colors) 001 Edelweiss, 070 Black (Special Colors) "XXX" indicates the color
<b>Standards</b>	: Meets the American Disabilities Act Guidelines and ICC/ANSI A117-1 requirements when installed so top of seat is 17" from the finished floor. Recommended seat for ADA requirements: Vitra 36-003-002 or 44-XXX-009 ASME A 112.19.2, CSA B45, ADA ICC/ANSI A 117-1, LADWP/SPS (City of Los Angeles)
<b>Warranty</b>	: 10 year limited warranty


1

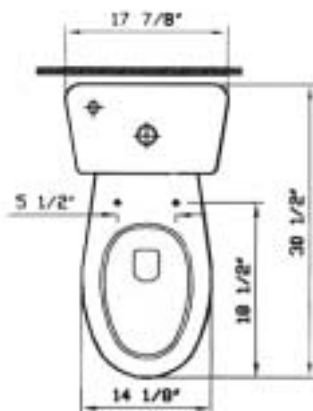

2

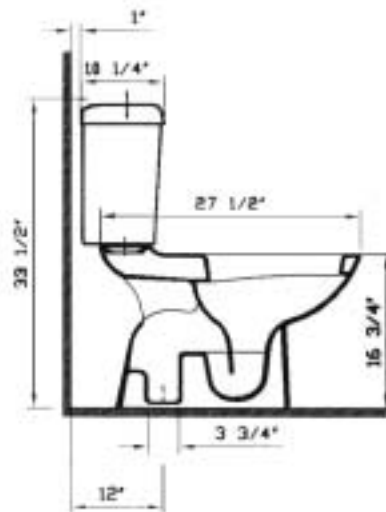

3



**Notes:**

- DIMENSIONS SHOWN FOR THE LOCATION OF THE SUPPLY IS SUGGESTED.
- INSTALLATION INSTRUCTIONS SUPPLIED WITH THE TOILET.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2, CSA Standard B45. These measurements may be subject to change. No responsibility is assumed for the use of superseded or voided pages.

April, 2005